

HLG-240H series



- Features :
- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- · IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- · Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- 5 years warranty (Note.10)



HLG-240H-12 A Blank : IP67 rated. Cable for I/O connection.


connected to the mains.

- A : IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.
- B : IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or 10V PWM signal or resistance.
- C : Terminal block for I/O connection. Output voltage and constant current level can be adjusted through internal potentiometer.
- D (option, safety pending) : IP67 rated. Timer dimming function, contact MEAN WELL for details.

SPECIFICATION


| MODEL | | HLG-240H-12 | HLG-240H-15 | HLG-240H-20 | HLG-240H-24 | HLG-240H-30 | HLG-240H-36 | HLG-240H-42 | HLG-240H-48 | HLG-240H-54 | | |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------------|-----------------|---------------|----------------|-------------|-------------|-------------|--|--|
| | DC VOLTAGE | 12V | 15V | 20V | 24V | 30V | 36V | 42V | 48V | 54V | | |
| OUTPUT | CONSTANT CURRENT REGION Note.4 | 6~12V | 7.5 ~ 15V | 10 ~ 20V | 12 ~ 24V | 15 ~ 30V | 18~36V | 21 ~ 42V | 24 ~ 48V | 27 ~ 54V | | |
| | RATED CURRENT | 16A | 15A | 12A | 10A | 8A | 6.7A | 5.72A | 5A | 4.45A | | |
| | RATED POWER | 192W | 225W | 240W | 240W | 240W | 241.2W | 240.24W | 240W | 240.3W | | |
| | RIPPLE & NOISE (max.) Note.2 | 150mVp-p | 150mVp-p | 150mVp-p | 150mVp-p | 200mVp-p | 250mVp-p | 250mVp-p | 250mVp-p | 350mVp-p | | |
| | VOLTAGE ADJ. RANGE Note.6 | | | | 22.4 ~ 25.6V | | 33.5 ~ 38.5V | 39 ~ 45V | 44.8~51.2V | | | |
| | | Can be adjusted by internal potentiometer A type and C type only | | | | | | | | | | |
| | CURRENT ADJ. RANGE | 8~16A | 7.5~15A | 6 ~ 12A | 5~10A | 4 ~ 8A | 3.3~6.7A | 2.86~5.72A | 2.5 ~ 5A | 2.23~4.45 | | |
| | VOLTAGE TOLERANCE Note.3 | ±2.5% | ±2.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | | |
| | LINE REGULATION | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | | |
| | LOAD REGULATION Note.8 | ±2.0% | ±1.5% | ±1.0% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | | |
| | SETUP, RISE TIME Note.9 | 1000ms,80m | I | 00ms,80ms/2 | 30VAC at full I | oad | | | 1 | | | |
| | HOLD UP TIME (Typ.) | 15ms at full load 230VAC /115VAC | | | | | | | | | | |
| | VOLTAGE RANGE Note.5 | | | | | | | | | | | |
| | FREQUENCY RANGE | 47 ~ 63Hz | | | | | | | | | | |
| | POWER FACTOR (Typ.) | PF>0.98/115VAC, PF>0.95/230VAC at full load (Please refer to "Power Factor Characteristic" curve) | | | | | | | | | | |
| | TOTAL HARMONIC DISTORTION | | | | | AC input and | | , | VAC input | | | |
| INPUT | EFFICIENCY (Typ.) | 90% | 90% | 91.5% | 92.5% | 92.5% | 92.5% | 92.5% | 93% | 93.5% | | |
| | AC CURRENT (Typ.) | 4A / 115VAC | 2A / 230V | | 277VAC | | | | | | | |
| | INRUSH CURRENT (Typ.) | | | | | 230VAC | | | | | | |
| | LEAKAGE CURRENT | COLD START 75A(twidth=570µ/s measured at 50% Ipeak) at 230VAC <0.75mA/277VAC | | | | | | | | | | |
| | | 95~108% | | | | | | | | | | |
| | OVER CURRENT Note.4 | Protection type : Constant current limiting, recovers automatically after fault condition is removed | | | | | | | | | | |
| | SHORT CIRCUIT | Hiccup mode, recovers automatically after fault condition is removed | | | | | | | | | | |
| PROTECTION | | $\begin{array}{c c c c c c c c c c c c c c c c c c c $ | | | | | | | | | | |
| | OVER VOLTAGE | Protection type : Shut down and latch off o/p voltage, re-power on to recover | | | | | | | | | | |
| | OVER TEMPERATURE | Shut down o/p voltage, recovers automatically after temperature goes down | | | | | | | | | | |
| | WORKING TEMP. | -40 ~ +70°C (Refer to "Derating Curve") | | | | | | | | | | |
| | | 20 ~ 95% RH non-condensing | | | | | | | | | | |
| ENVIRONMENT | STORAGE TEMP., HUMIDITY | -40 ~ +80°C, 10 ~ 95% RH | | | | | | | | | | |
| EntratorialEntr | TEMP. COEFFICIENT | ±0.03%/°C (0~50°C) | | | | | | | | | | |
| | VIBRATION | | | le neriod for 7 | 2min each al | ong X V 7 ave | 2 | | | | | |
| | | 10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes UL1012, CAN/CSA-C22.2 No. 107.1-01, UL8750, CSA C22.2 No. 250.0-08, TUV EN61347-1, EN61347-2-13 independent | | | | | | | | | | |
| | SAFETY STANDARDS Note.7 | (except for HLG-240H C type), UL60950-1, UL8750, CSX C22.2 No. 230.0-06, TOV EN01347-1, EN01347-2-13 independent | | | | | | | | | | |
| SAFETY & | WITHSTAND VOLTAGE | I/P-O/P:3.75KVAC I/P-FG:2KVAC 0/P-FG:1.5KVAC | | | | | | | | | | |
| EMC | ISOLATION RESISTANCE | | | | | | | | | | | |
| LINO | EMC EMISSION | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH | | | | | | | | | | |
| | EMC IMMUNITY | Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (≧50% load) ; EN61000-3-3 Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (surge 4KV), criteria B | | | | | | | | | | |
| | MTBF | 207.9K hrs min. MIL-HDBK-217F (25°C) | | | | | | | | | | |
| OTHERS | DIMENSION | | | HLG-240H-Bla | | 51*68*38.8mm | (I *\W*H)/HI G | 240H_C) | | | | |
| | PACKING | | ()(| | , | | | | 0-C) | | | |
| NOTE | All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. Tolerance : includes set up tolerance, line regulation and load regulation. Please refer to "DRIVING METHODS OF LED MODULE". Derating may be needed under low input voltages. Please check the static characteristics for more details. A type and C type only. Safety and EMC design refer to EN60598-1, subject 8750(UL), CNS15233, GB7000.1, FCC part18. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the | | | | | | | | | | | |
| | complete installation, the fin 10. Refer to warranty statement | e installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. | | | | | | | | | | |



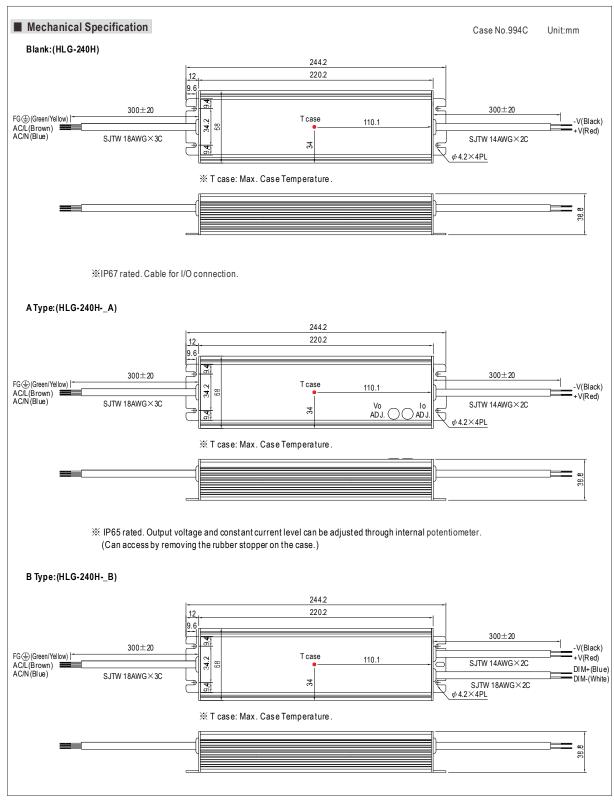




240W Single Output Switching Power Supply

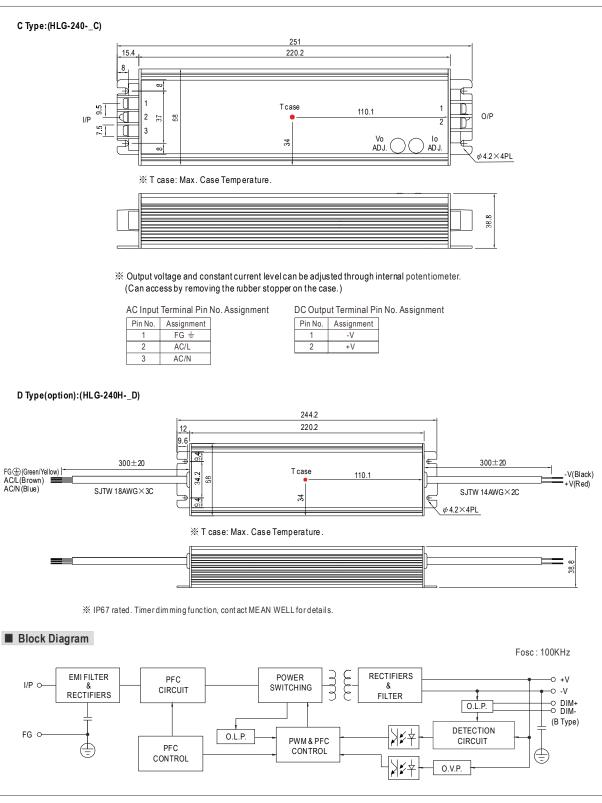



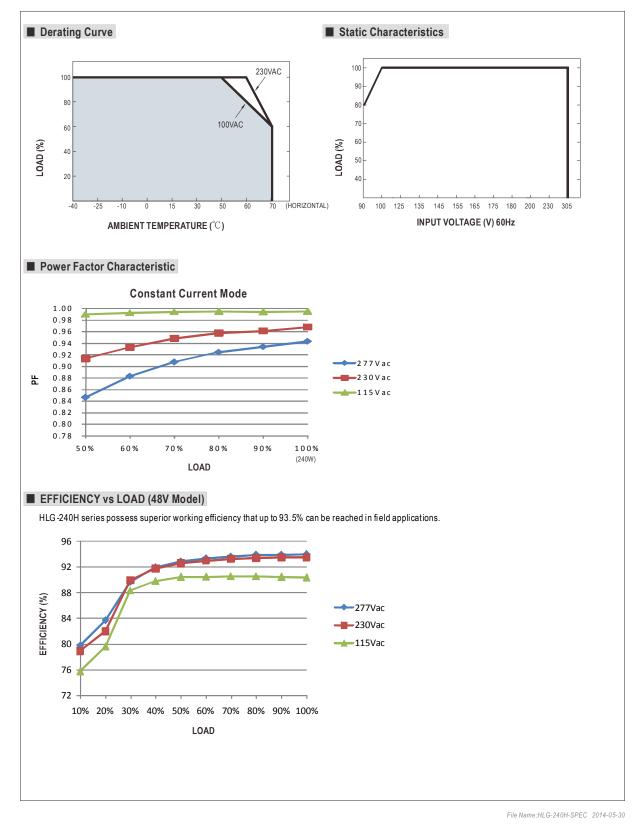




DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver". A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs. Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B). In the constant current region, the highest voltage at the output of the driver

depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.



DIMMING OPERATION (for B-type only)



※ Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.

※ Please DO NOT connect "DIM-" to "-V".

% Reference resistance value for output current adjustment (Typical)

| Resistance value | Single driver | 10K Ω | 20K Ω | 30K Ω | 40K Ω | 50K Ω | 60K Ω | 70K Ω | 80K Ω | 90K Ω | $100 \mathrm{K}\Omega$ | OPEN |
|-----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|------------------------|----------|
| | Multiple drivers (N=driver quantity fors ynchronized dim ming operation) | 10K Ω/N | 20K Ω/N | 30K Ω/N | 40K Ω/N | 50K Ω/N | 60K Ω/N | 70K Ω/N | 80K Ω/N | 90K Ω/N | 100K Ω/N | |
| Percentage | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | 95%~108% | |
| × 1~10V dimming function for output current adjustment (Typical) | | | | | | | | | | | | |
| Dimming value | | 1V | 2V | 3V | 4V | 5V | 6V | 7V | 8V | 9V | 10V | OPEN |
| Percentage of rated current | | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | 95%~108% |
| % 10V PWM signal for output current adjustment (Typical): Frequency range :100Hz ~ 3KHz | | | | | | | | | | | | |

Dutyvalue 10% 20% 30% 40% 50% 60% 70% 80% 90% 100% OPEN Percentage of rated current 10% 20% 30% 40% 50% 60% 70% 80% 90% 100% 95%~108%

% Using the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

% Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.

Dimming connection diagram for turning the lighting fixture ON/OFF :

N FG Т Switch Adjuster Relay 10K~100K Ohms resistance 1~10V DC Voltage 10V PWM Signal Blue -0 🕀 DIM+ . റ Green/ Yellow White HLG-240H DIM- 0--o AC/L Black Brown V(-) 0 В Туре Red LED Lighting Fixture V(+) -O AC/N 0 Blue

Using a switch and relay can tum ON/OFF the lighting fixture.

1. Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-. 2. The LED lighting fixture can be turned ON/OFF by the switch.



